


## User Manual - KVM Rear Kit Version for LCD Console Drawer

**Matrix Cat6  KVM**

**-MUIP1613 / 1624**

**-MUIP3213 / 3224**




back



**Matrix Cat6 KVM**

**-MU1602 / 1603 / 1604**

**-MU3202 / 3203 / 3204**



back



Designed and manufactured by Austin Hughes

751

## Legal Information

First English printing, October 2002

Information in this document has been carefully checked for accuracy; however, no guarantee is given to the correctness of the contents. The information in this document is subject to change without notice. We are not liable for any injury or loss that results from the use of this equipment.

## Safety Instructions

**Please read all of these instructions carefully before you use the device. Save this manual for future reference.**

- Unplug equipment before cleaning. Don't use liquid or spray detergent; use a moist cloth.
- Keep equipment away from excessive humidity and heat. Preferably, keep it in an air-conditioned environment with temperatures not exceeding 40° Celsius (104° Fahrenheit).
- When installing, place the equipment on a sturdy, level surface to prevent it from accidentally falling and causing damage to other equipment or injury to persons nearby.
- When the equipment is in an open position, do not cover, block or in any way obstruct the gap between it and the power supply. Proper air convection is necessary to keep it from overheating.
- Arrange the equipment's power cord in such a way that others won't trip or fall over it.
- If you are using a power cord that didn't ship with the equipment, ensure that it is rated for the voltage and current labeled on the equipment's electrical ratings label. The voltage rating on the cord should be higher than the one listed on the equipment's ratings label.
- Observe all precautions and warnings attached to the equipment.
- If you don't intend on using the equipment for a long time, disconnect it from the power outlet to prevent being damaged by transient over-voltage.
- Keep all liquids away from the equipment to minimize the risk of accidental spillage. Liquid spilled on to the power supply or on other hardware may cause damage, fire or electrical shock.
- Only qualified service personnel should open the chassis. Opening it yourself could damage the equipment and invalidate its warranty.
- If any part of the equipment becomes damaged or stops functioning, have it checked by qualified service personnel.

## What the warranty does not cover

- Any product, on which the serial number has been defaced, modified or removed.
- Damage, deterioration or malfunction resulting from:
  - ☐ Accident, misuse, neglect, fire, water, lightning, or other acts of nature, unauthorized product modification, or failure to follow instructions supplied with the product.
  - ☐ Repair or attempted repair by anyone not authorized by us.
  - ☐ Any damage of the product due to shipment.
  - ☐ Removal or installation of the product.
  - ☐ Causes external to the product, such as electric power fluctuation or failure.
  - ☐ Use of supplies or parts not meeting our specifications.
  - ☐ Normal wear and tear.
  - ☐ Any other causes which does not relate to a product defect.
- Removal, installation, and set-up service charges.

## Regulatory Notices Federal Communications Commission (FCC)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

Any changes or modifications made to this equipment may void the user's authority to operate this equipment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Re-position or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

# Contents

## < Part 1 > Matrix Cat6 KVM Kit

<b>MU-IP1613</b>	<b>MU-IP1624</b>
<b>MU-IP3213</b>	<b>MU-IP3224</b>

1.1	<b>Package contents</b>	P.1
1.2	<b>KVM port &amp; Cat6 dongle connection</b>	P.2
1.3	<b>IP &amp; Remote console connection</b>	P.3 - 4
1.4	<b>IP console setting</b>	P.5
1.5	<b>KVM Cascade</b>	P.6
1.6	<b>Specifications</b>	P.7
1.7	<b>Resolution Support Information</b>	P.8

## < Part 2 > Matrix Cat6 KVM Kit

<b>MU-1602</b>	<b>MU-1603</b>	<b>MU-1604</b>
<b>MU-3202</b>	<b>MU-3203</b>	<b>MU-3204</b>

2.1	<b>Package contents</b>	P.9 - 10
2.2	<b>KVM port &amp; Cat6 dongle connection</b>	P.11
2.3	<b>Remote console connection</b>	P.12 - 13
2.4	<b>KVM Cascade</b>	P.14
2.5	<b>Specifications</b>	P.15
2.6	<b>Resolution Support Information</b>	P.16


## < Part 3 > Usage

3.1	<b>KVM Button</b>	P.17
3.2	<b>Password</b>	P.18
3.3	<b>KVM OSD</b>	P.19
3.4	<b>KVM Hotkey / Remote Console Hotkey</b>	P.20

**-MUIP1613 / -MUIP3213**  
**-MUIP1624 / -MUIP3224**

- Receiver box for remote console x 1
- Power adapter w/ power cord ( for receiver ) x 1
- CE-6 6ft Combo KVM cable for receiver box x 1

**KVM Rear Kit**




back



**-MUIP1613**

Remote Console 1

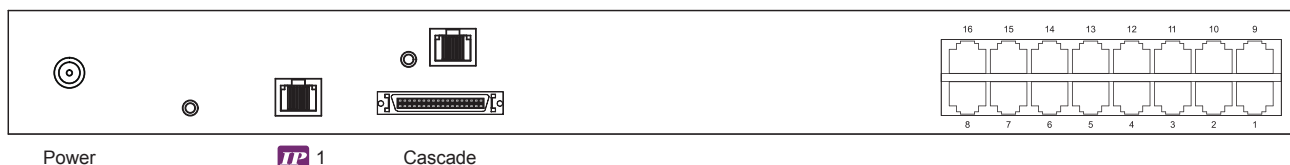


Power

**IP** 1


Cascade

**-MUIP3213**

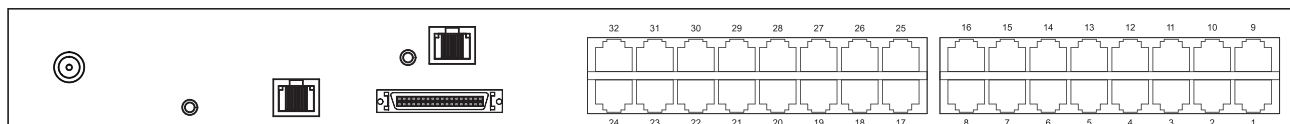

**-MUIP1624**

Remote Console 1

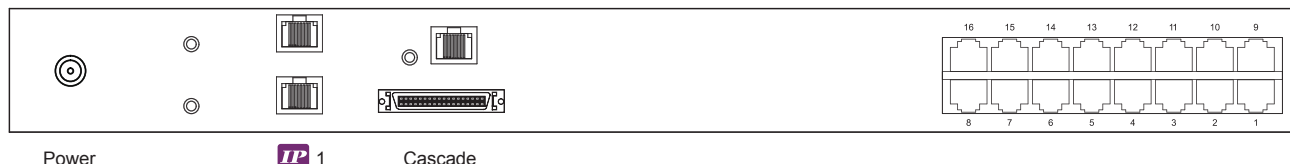



Power

**IP** 1

Cascade

**-MUIP3224**

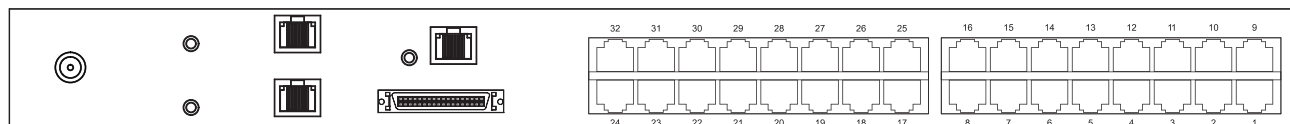

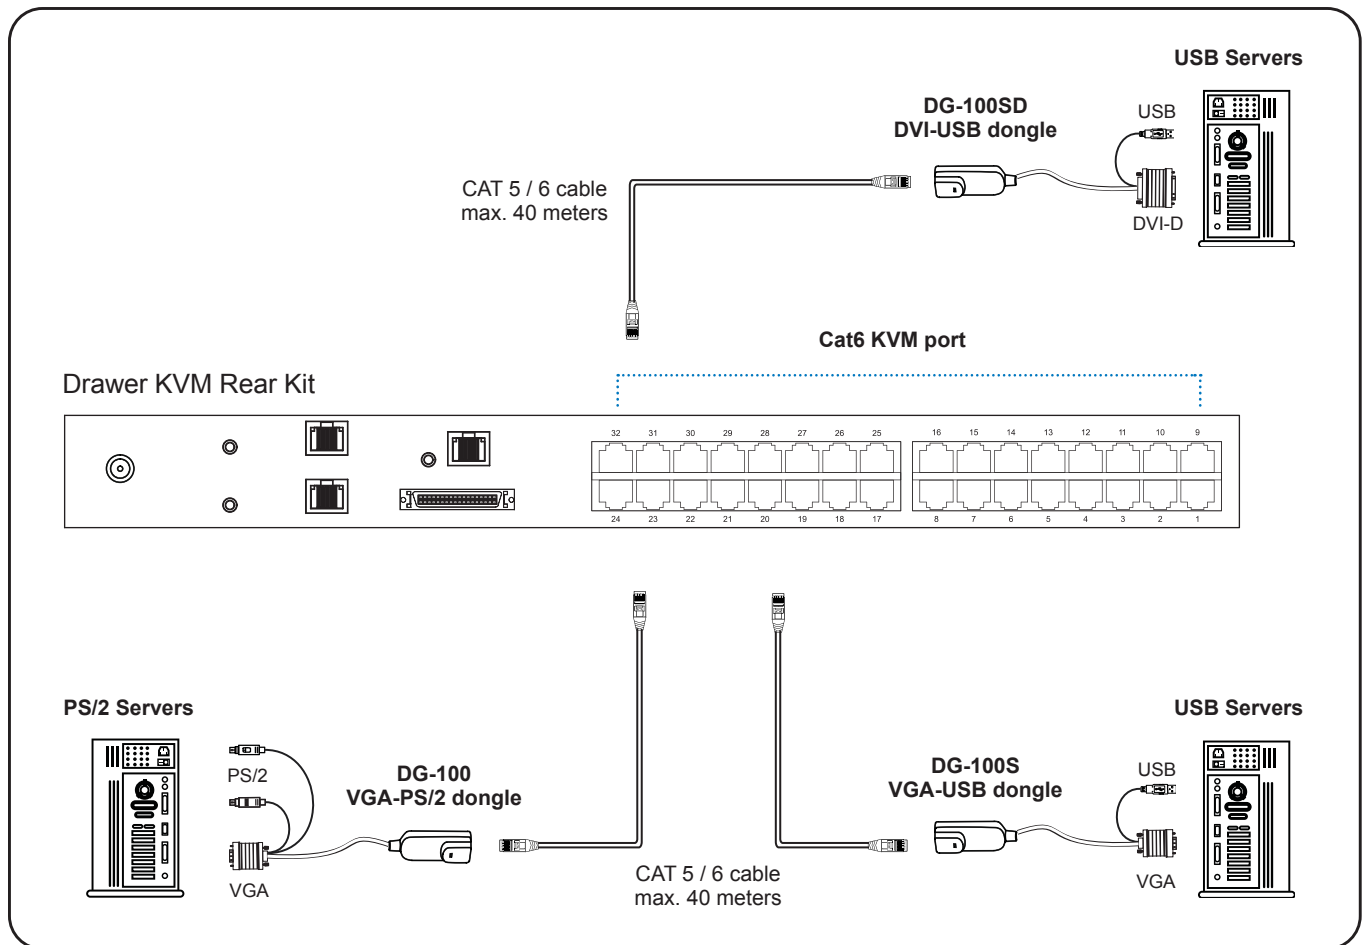

### DG-100SD DVI-USB dongle

- To connect DVI-D connector to the computer's video card
- To connect USB connector to the computer's USB port




### DG-100S VGA-USB dongle


- To connect DB-15 connector to the computer's video card
- To connect USB connector to the computer's USB port




### DG-100 VGA-PS/2 dongle

- To connect DB-15 connector to the computer's video card
- To connect PS/2 keyboard connector to the computer's keyboard port
- To connect PS/2 mouse connector to the computer's mouse port

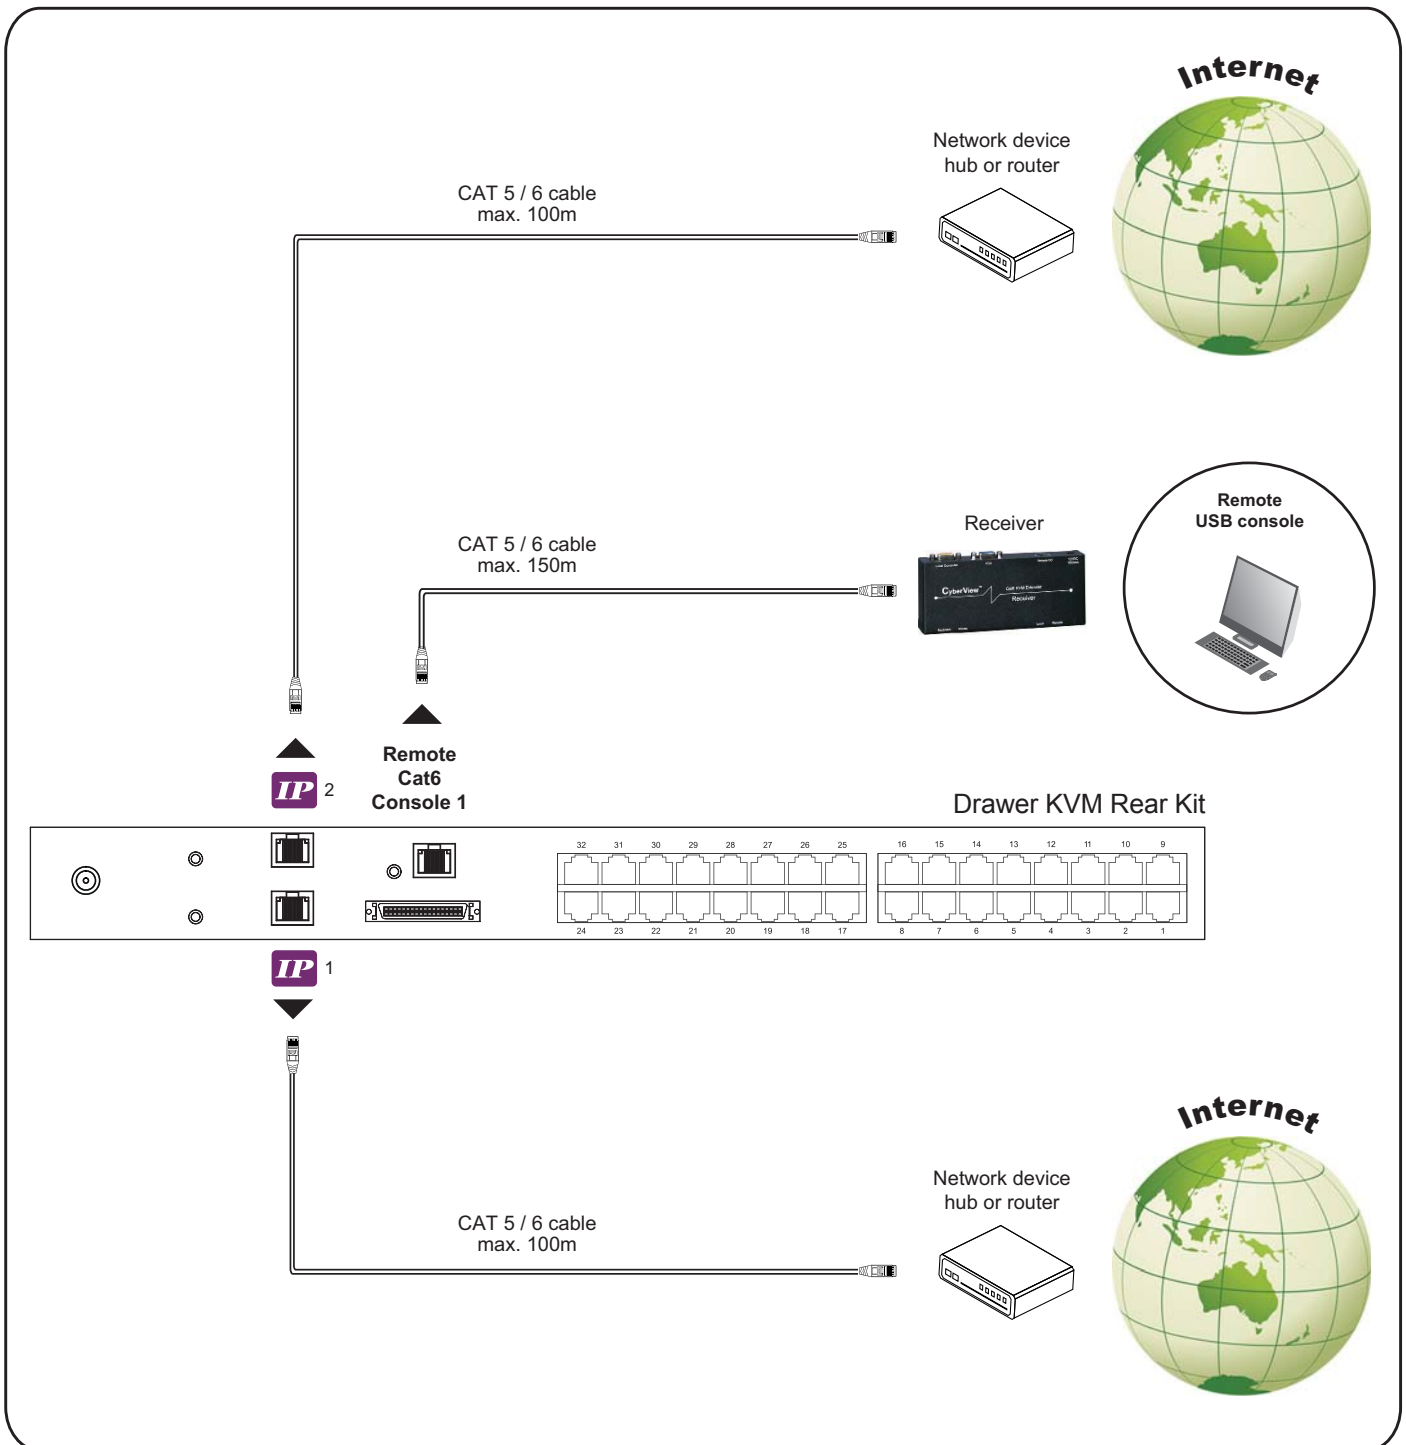

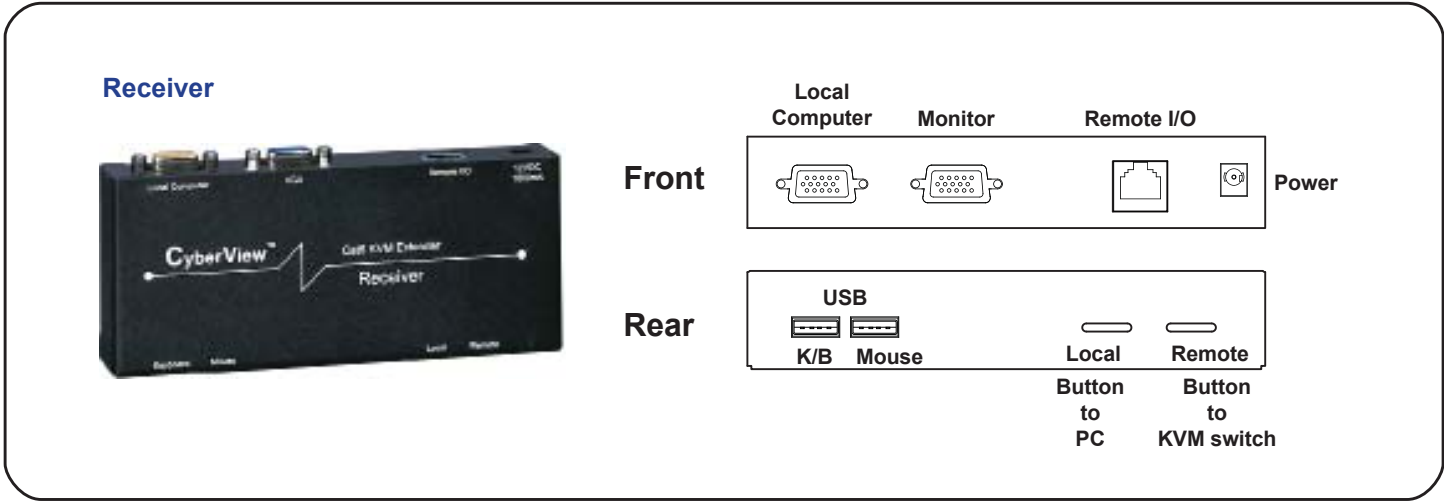

The receiver provides a hotkey function for remote console. Please refer to P.20

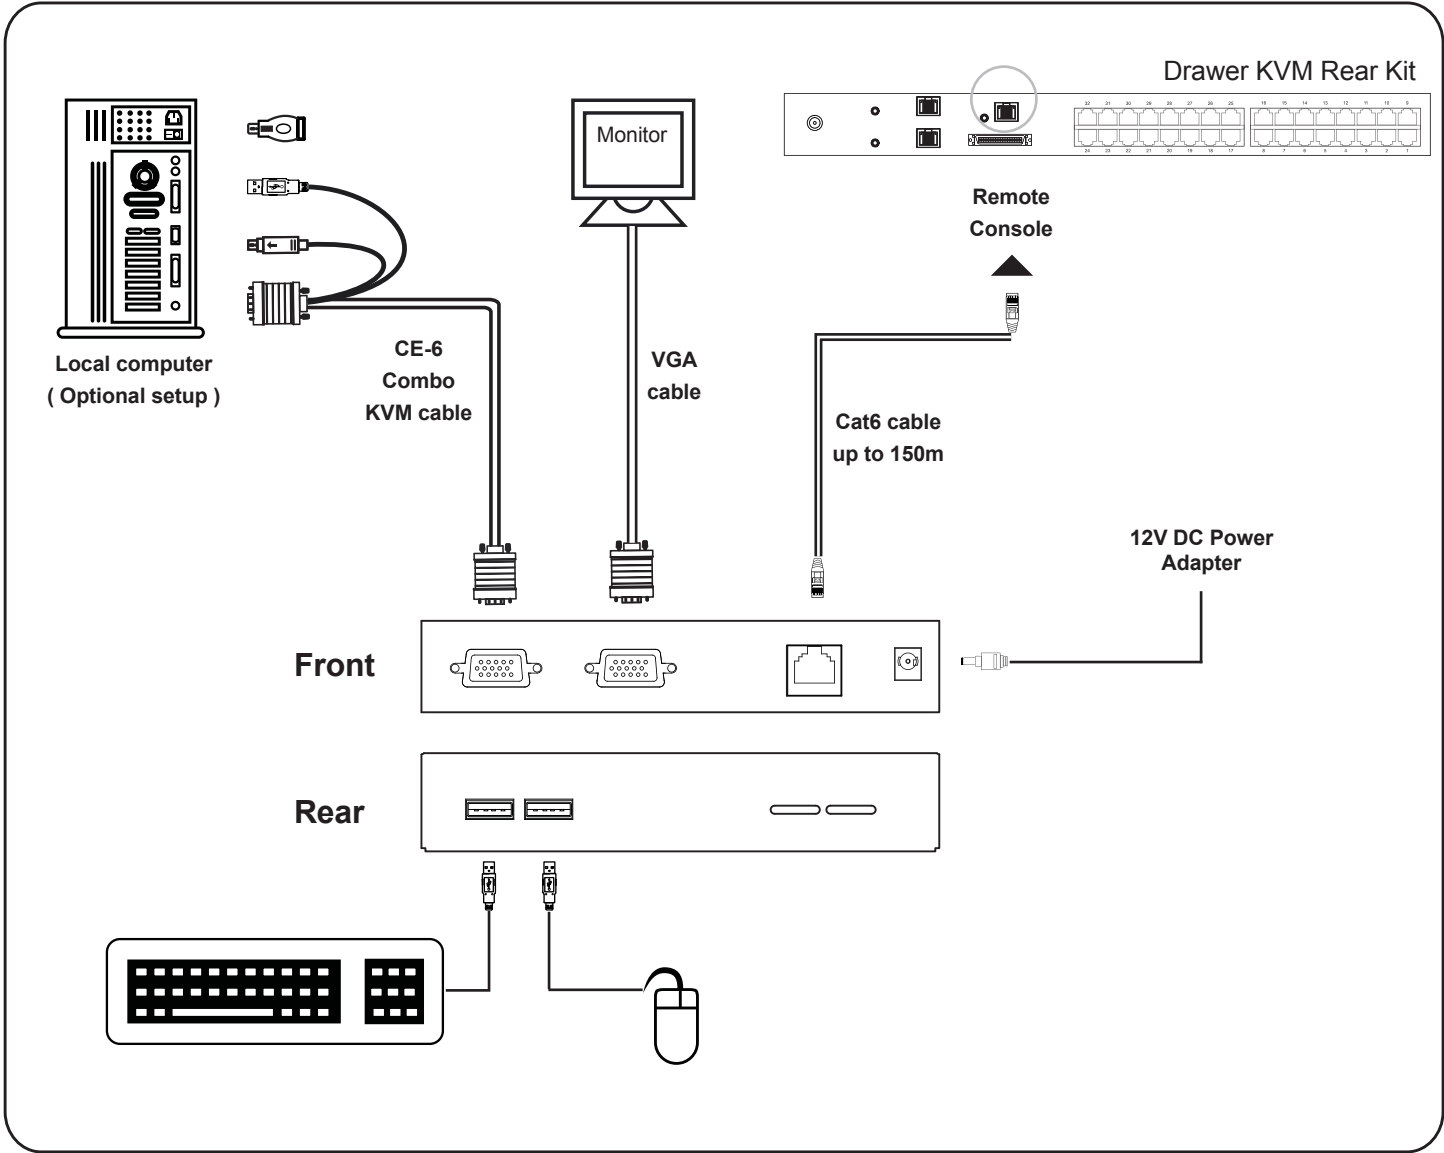

After the cable connection, please take the following steps to configure the IP KVM :

1. Download **IPKVMsetup.exe** from the link:

[www.austin-hughes.com/support/utilities/cyberview/IPKVMsetup.exe](http://www.austin-hughes.com/support/utilities/cyberview/IPKVMsetup.exe)

2. Double click **IPKVMsetup.exe** to configure the IP KVM by device setup as below.

3. Click **Refresh Device** to search the connected IP KVM
4. Select the M.A.C. address, which you want to setup, then click **Query Device**
5. Enter Super user login. **The default is super**
6. Enter Super user password. **The default is pass**
7. Enter the new super user password
8. Re-enter the new password
9. Change the desired IP address / Subnet mask / Gateway, then click **Setup Device** to confirm the setting to IP KVM
10. The default address is as below:--
  - The single IP KVM model, such as MU-IP3213 - <http://192.168.1.22>
  - The dual IP KVM model, such as MU-IP3224 - <http://192.168.1.22> (for 1st IP)  
<http://192.168.1.23> (for 2nd IP)
11. Open Internet Explorer ( I.E. ), version 6.0 or above
12. Enter the IP KVM address into the address bar
  - For Single IP - <http://192.168.1.22>
  - For Dual IP - <http://192.168.1.22> ( for 1st IP )  
<http://192.168.1.23> ( for 2nd IP )
13. Enter username ( default is super )  
Password ( default is pass )

14. After successful login to IP KVM, the user will enter the main page of IP KVM



**The setting is enough for intranet.**

**If the users access KVM GUI via internet, please ask MIS for assistance and download IP KVM user manual from the link :**

**[www.austin-hughes.com/support/usermanual/cyberview/UM-CV-IP.pdf](http://www.austin-hughes.com/support/usermanual/cyberview/UM-CV-IP.pdf)**




## < 1.5 > KVM Cascade

## Matrix Cat6 IP KVM

- Cascade up to 8 levels, 256 servers
- Cascading multiple KVM with CMC-8 cascade cable.

- ⚠ **Cascaded KVMs from level 2 to 8 must be the models of MU-1602 / MU-3202 or M-802 / M-1602.**
- ⚠ **When multiple matrix KVMs cascade together, the master KVM at level 1 will take all control of other slave KVM switches (e.g. level 2 to 8).**
- ⚠ **The slave matrix KVM will be as a port expansion module of the master matrix KVM, the original remote console on slave KVM will be sacrificed and disabled.**

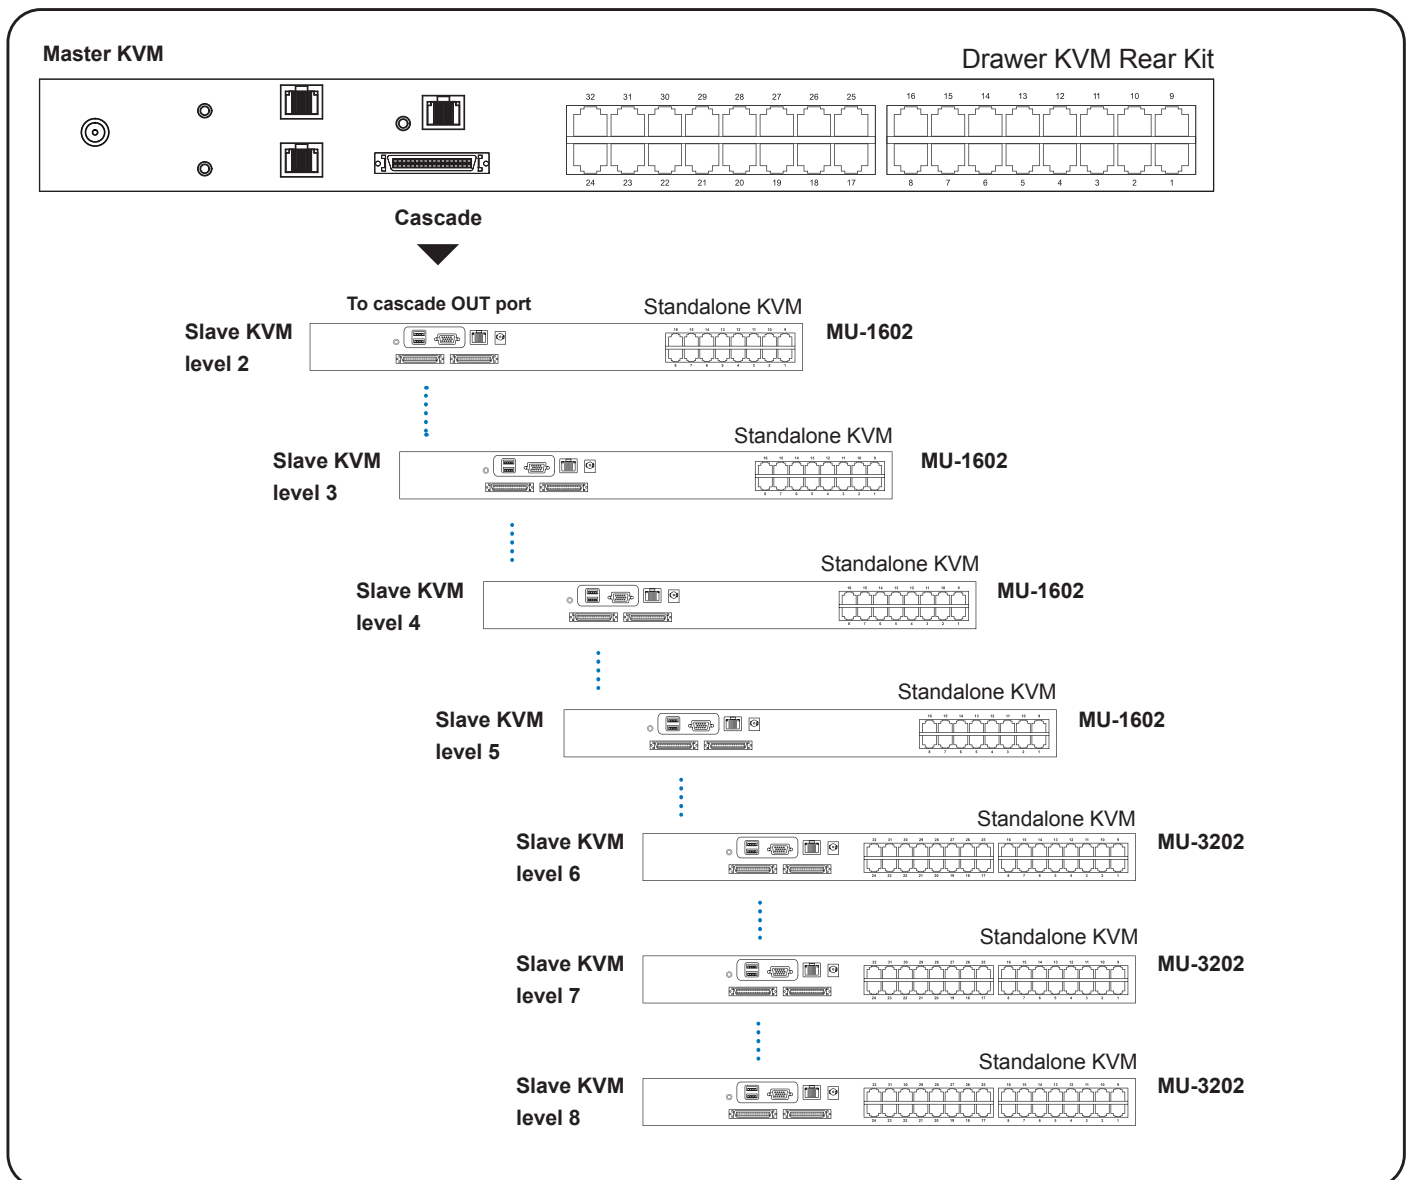

### CMC-8

- 8ft Matrix KVM cascade cable

<b>-MUIP1613 -MUIP3213</b>		<b>-MUIP1624 -MUIP3224</b>	
<b>■ KVM Port</b>			
Number of ports:	16 or 32		
Connector:	RJ-45		
Connectivity:	DVI-D / VGA connector dongle up to 40 meters (132 feet) via Cat6 / Cat5 cable		
<b>■ Local Console</b>		Nil for LCD console drawer version	
<b>■ Cat6 Remote Console</b>			
Number of remote port:	1		
Monitor port:	DB15-pin VGA, up to 1600 x 1200		
Keyboard & mouse port:	2 x USB type connector for keyboard & mouse		
Remote I/O:	RJ45 via Cat5 / Cat5e / Cat6 cable up to 500 feet		
<b>■ IP Remote Console</b>			
Number of IP console:	1 for MU-IP1613 / MU-IP3213 2 for MU-IP1624 / MU-IP3224		
User management:	15-user login, 1 x active user		
Browser:	Internet Explorer, Firefox, Safari		
Security:	SSL v3, RSA, AES, HTTP / HTTPS, CSR		
IP Access:	RJ45 Ethernet per IP console		
<b>■ Expansion:</b>		Up to 256 servers by 8-level cascade	
<b>■ Compatibility</b>			
Multi-platform:	Mix PCs, SUN and Mac G3 / G4 Mac / iMac		
Support:	Windows 7 / Vista / 2003 / XP, Linux, Unix		
<b>■ Power</b>			
Input:	AC power adapter		
Consumption:	Max. 48 Watt, Standby 5 Watt		
<b>■ Regulatory</b>			
Safety:	FCC & CE certified		
Environment:	RoHS2 & REACH compliant		
<b>■ Environmental</b>			
Operating:	0 to 50°C		
Storage:	-5 to 60°C		
Relative humidity:	90%, non-condensing		
Shock:	50G peak acceleration (11ms, half-sine wave)		
Vibration:	58~100Hz / 0.98G (11ms / cycle)		

	Max 4:3 LCD	Max 16:10 LCD
Remote console	1600 x 1200	1440 x 900
Local console	1600 x 1200	1440 x 900
IP console	1600 x 1200	N/A

Cat6 Dongle	EDID Resolution Hard-coded	Resolutions Capable			
		4:3			16:10
		1024 x 768	1280 x 1024	1600 x 1200	1440 x 900
DG-100	1600 x 1200	✓	✓	✓	✓*
DG-100S	1600 x 1200	✓	✓	✓	✓*
DG-100SD	1280 x 1024	✓	✓	✗	✗

\* Requires the user to enable showing unsupported resolutions via the target computer's video adapter settings ( effectively ignoring the DDC / EDID )

## < Part 2 > Matrix Cat6 KVM


### < 2.1 > Package Contents

#### Matrix Cat6 KVM

##### -MU1602 / -MU3202

- Receiver box for remote console x 1
- Power adapter w/ power cord ( for receiver ) x 1
- CE-6 6ft Combo KVM cable for receiver box x 1

##### KVM Rear Kit




back



##### -MU1603 / -MU3203

- Receiver box for remote console x 2
- Power adapter w/ power cord ( for receiver ) x 2
- CE-6 6ft Combo KVM cable for receiver box x 2

##### KVM Rear Kit




back



##### -MU1604 / -MU3204

- Receiver box for remote console x 3
- Power adapter w/ power cord ( for receiver ) x 3
- CE-6 6ft Combo KVM cable for receiver box x 3


##### KVM Rear Kit




back




## -MU1602

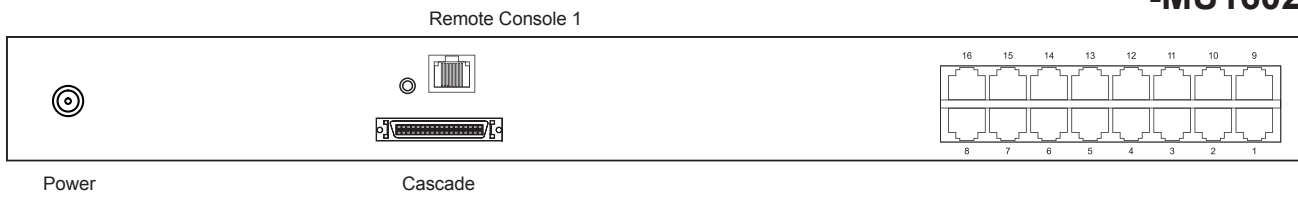


## -MU3202

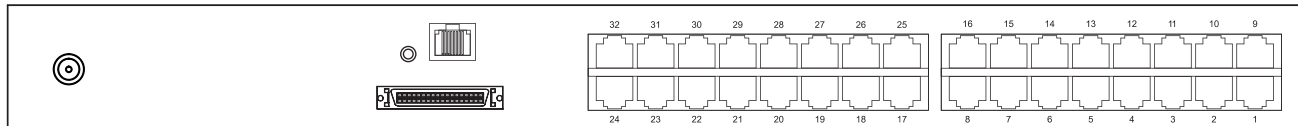


## -MU1603

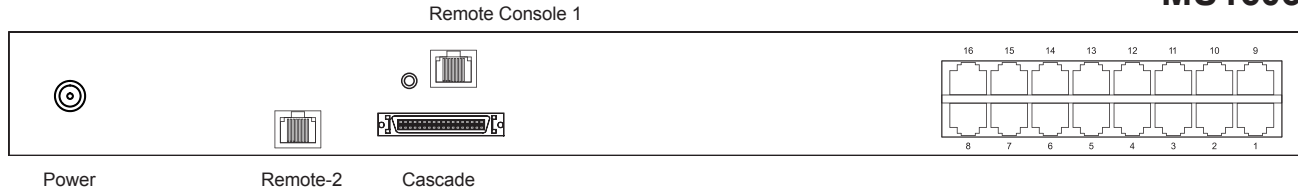


## -MU3203

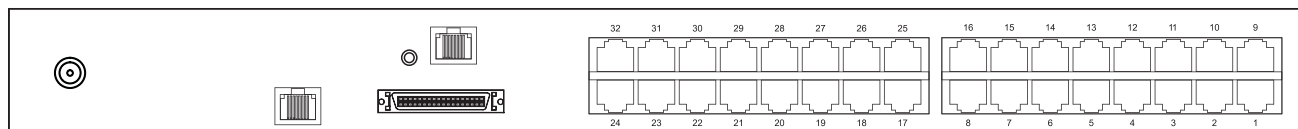


## -MU1604

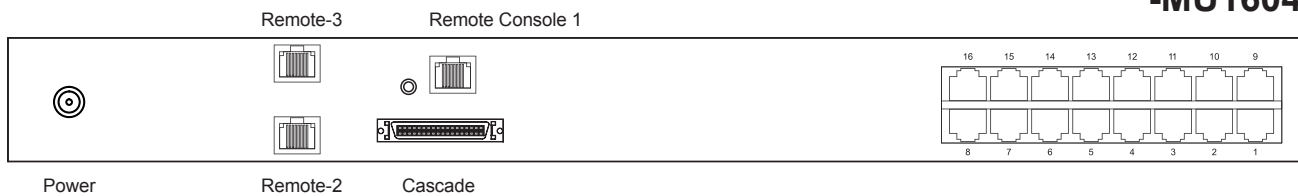

## -MU3204

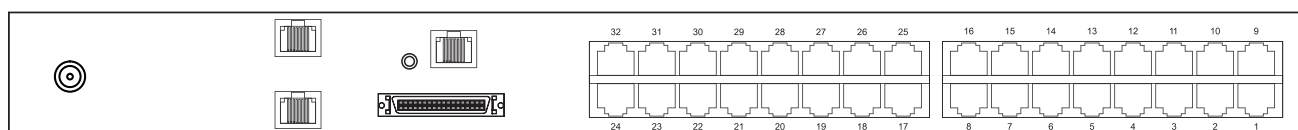

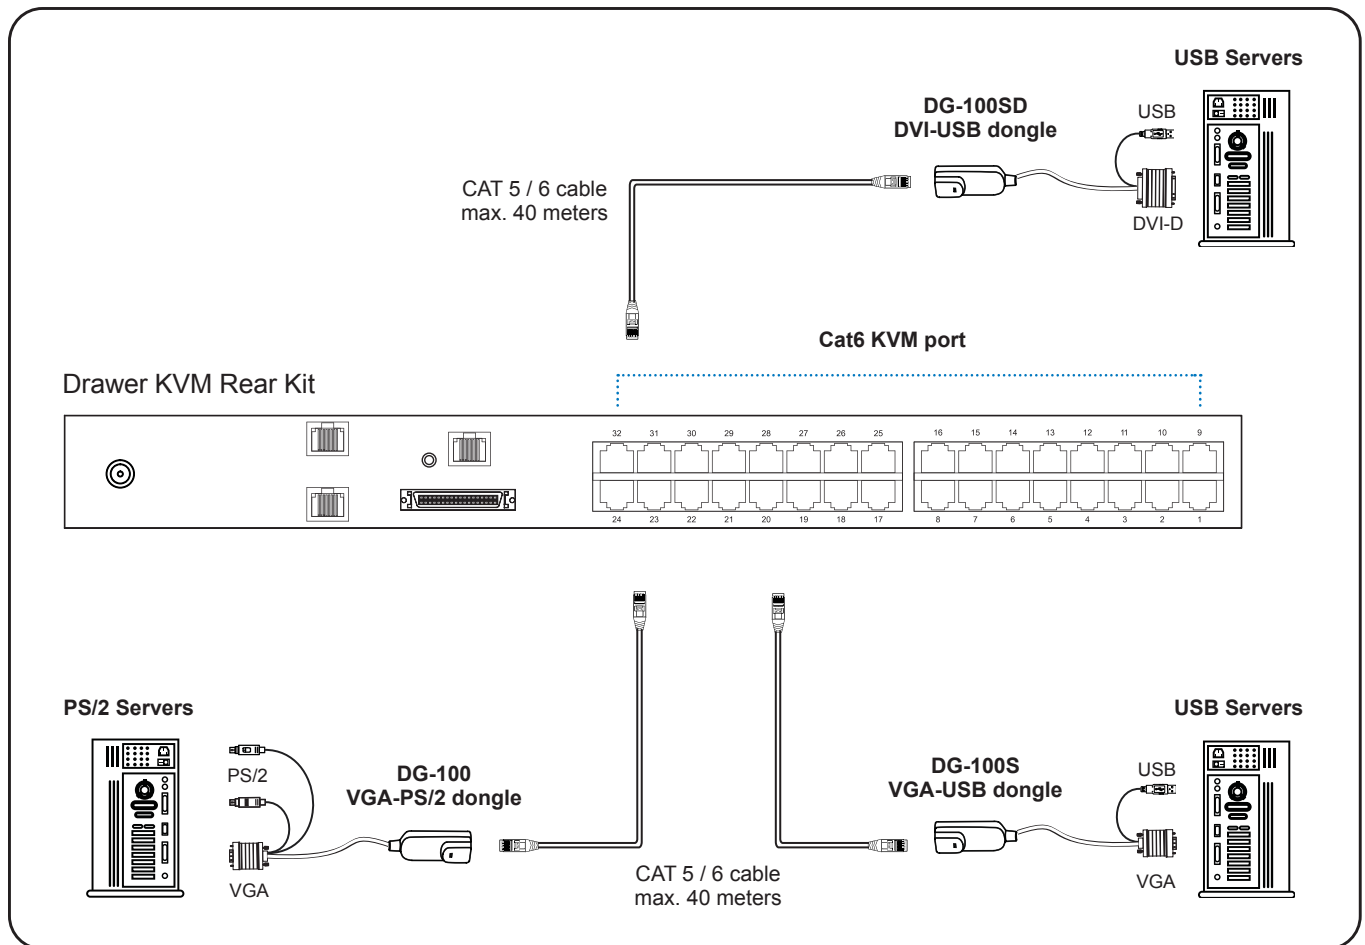

## DG-100SD DVI-USB dongle

- To connect DVI-D connector to the computer's video card
- To connect USB connector to the computer's USB port




## DG-100S VGA-USB dongle

- To connect DB-15 connector to the computer's video card
- To connect USB connector to the computer's USB port




## DG-100 VGA-PS/2 dongle


- To connect DB-15 connector to the computer's video card
- To connect PS/2 keyboard connector to the computer's keyboard port
- To connect PS/2 mouse connector to the computer's mouse port

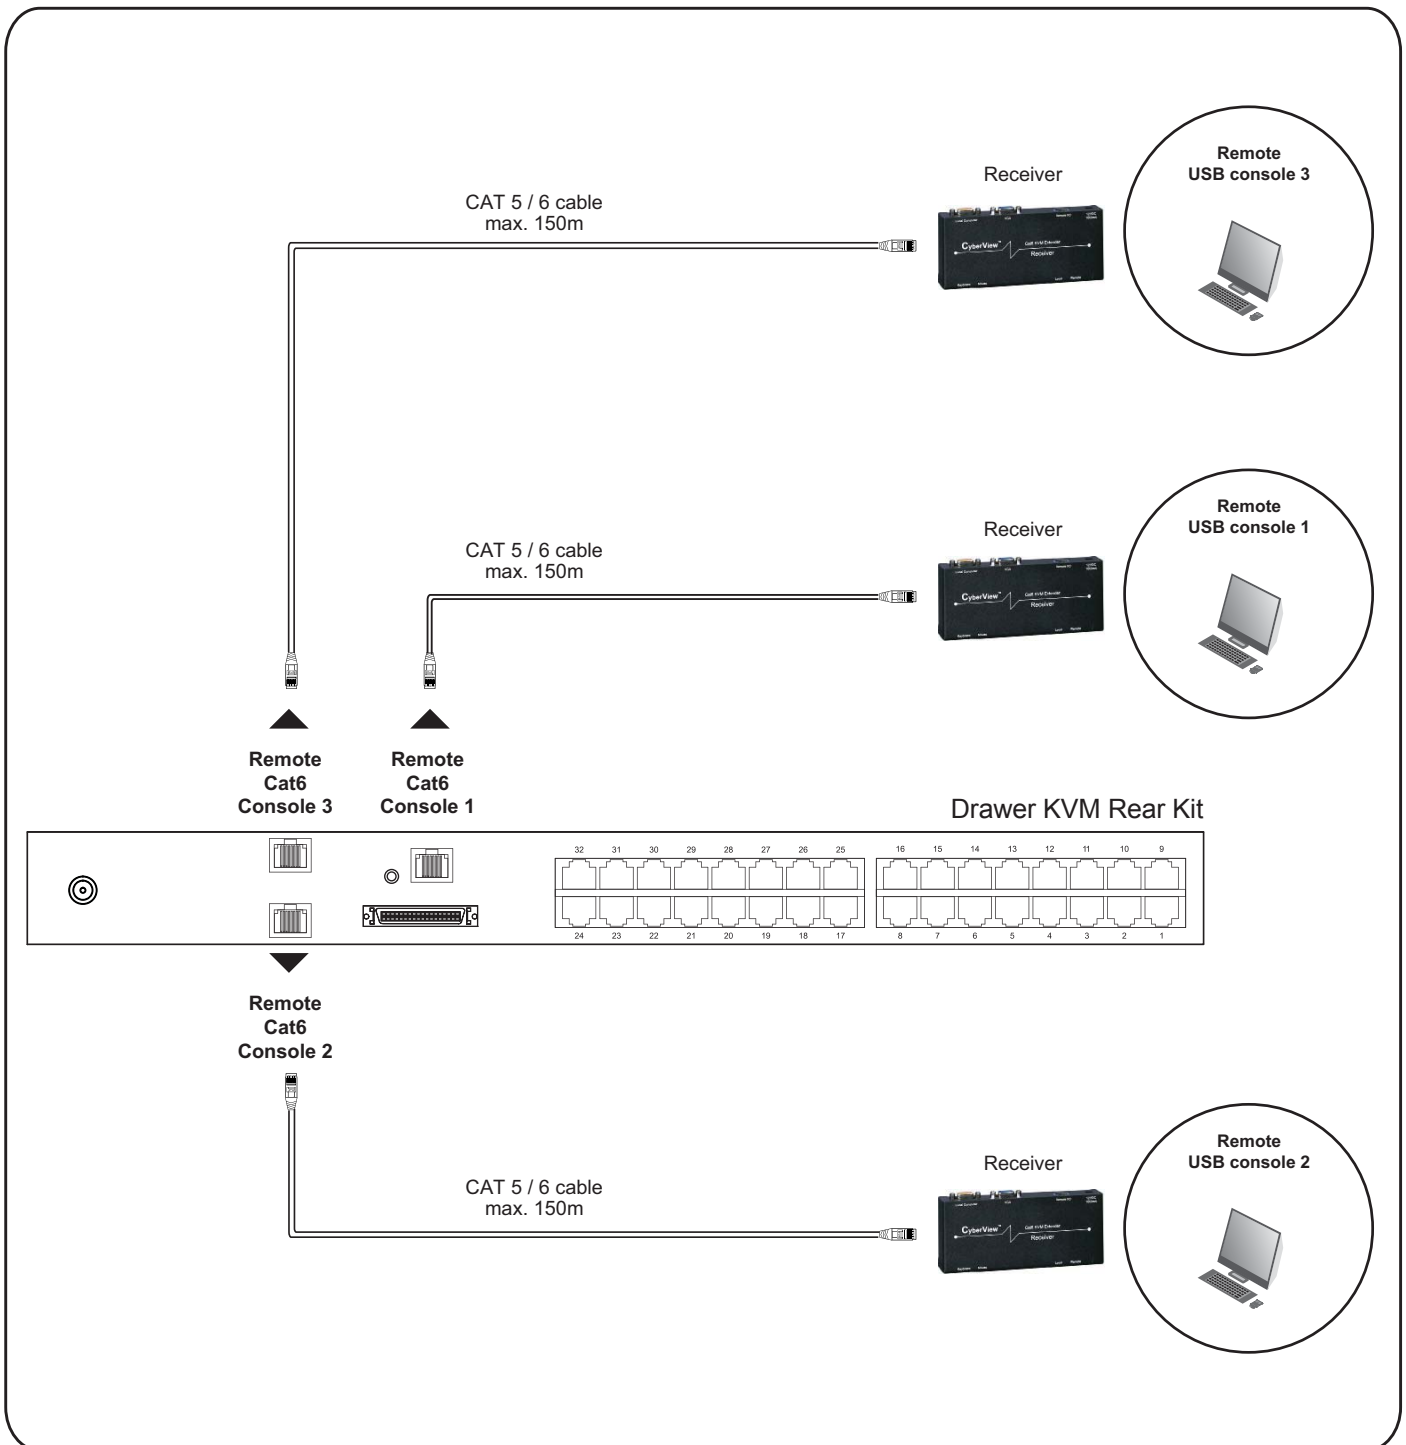

Receiver

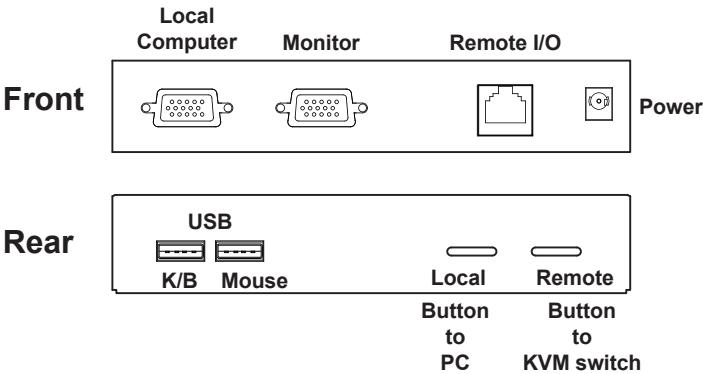

The receiver provides a hotkey function for remote console. Please refer to P.20

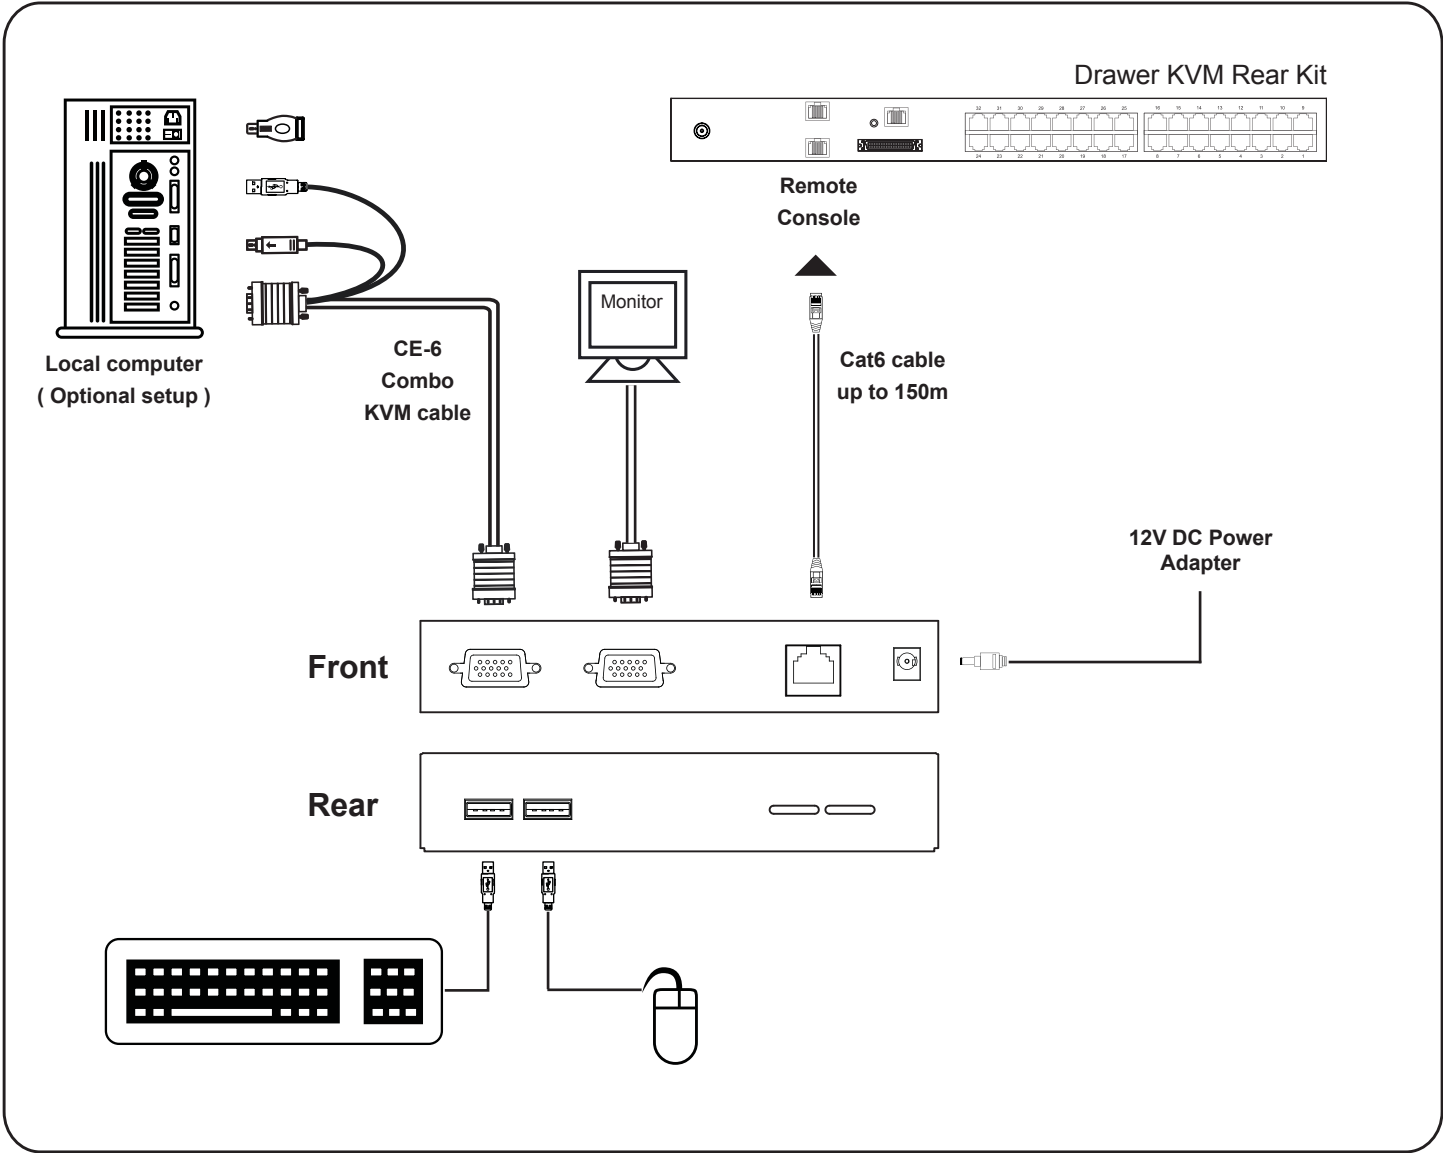




## < 2.4 > KVM Cascade

## Matrix Cat6 KVM

- Cascade up to 8 levels, 256 servers
- Cascading multiple KVM with CMC-8 cascade cable.

- ⚠ Cascaded KVMs from level 2 to 8 must be the models of MU-1602 / MU-3202 or M-802 / M-1602.
- ⚠ When multiple matrix KVMs cascade together, the master KVM at level 1 will take all control of other slave KVM switches (e.g. level 2 to 8).
- ⚠ The slave matrix KVM will be as a port expansion module of the master matrix KVM, the original remote console on slave KVM will be sacrificed and disabled.

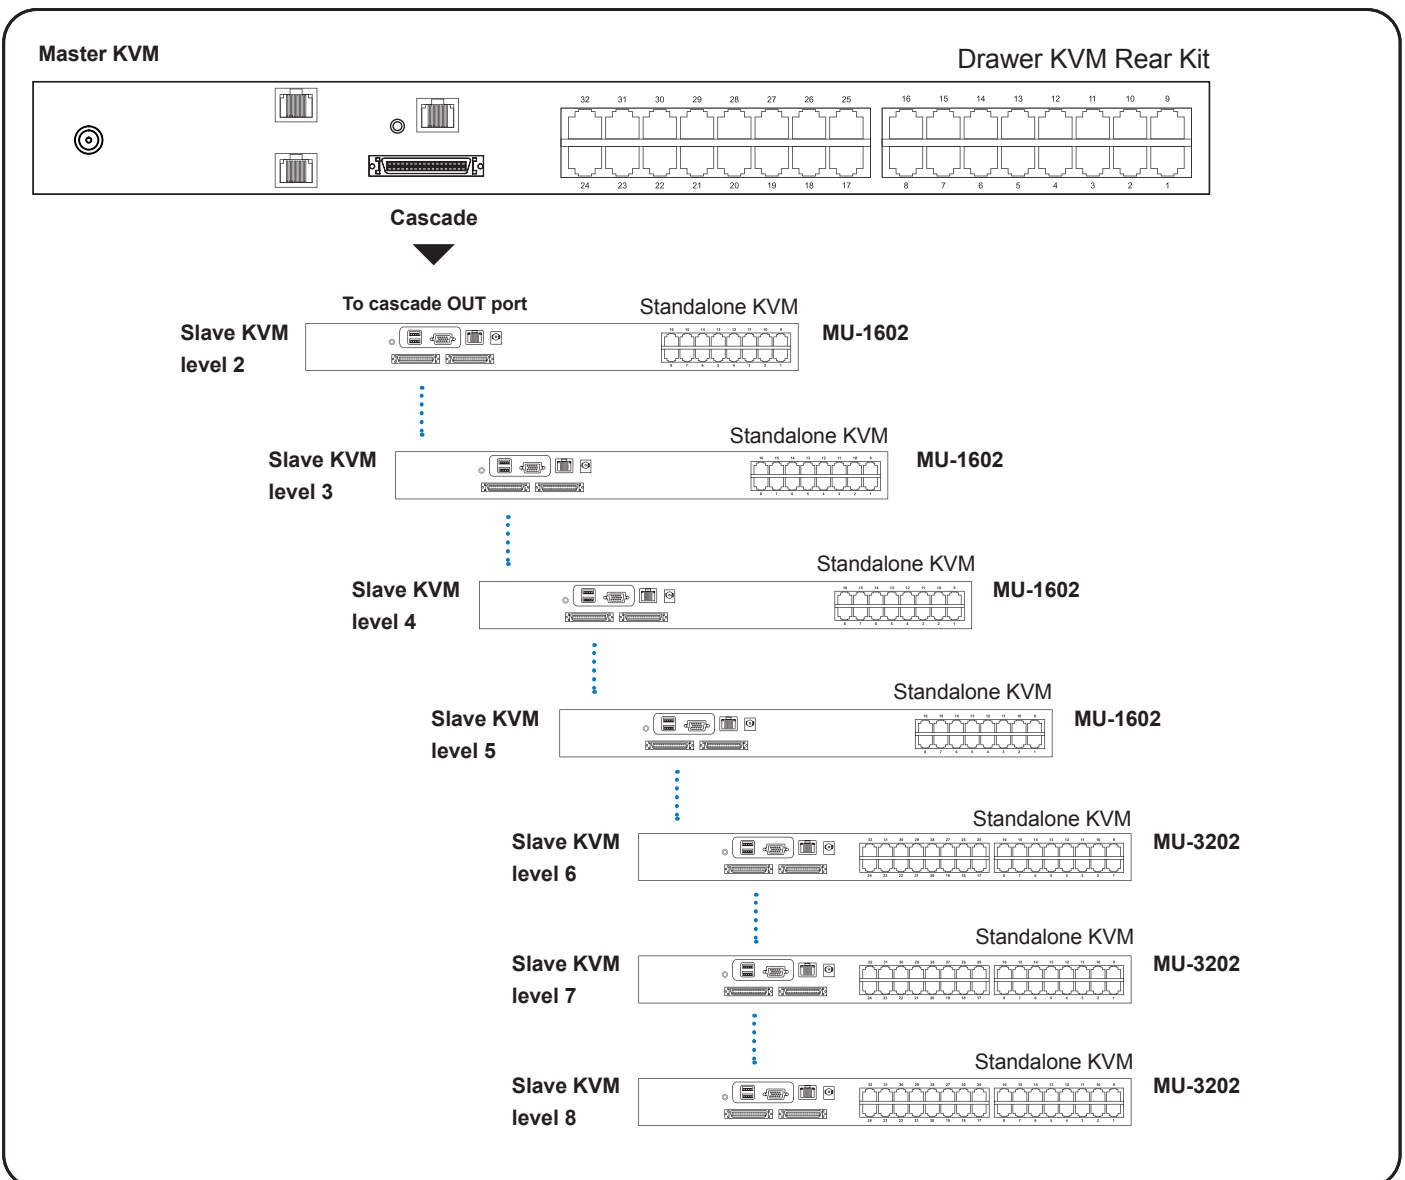

### CMC-8

- 8ft Matrix KVM cascade cable

	-MU1602 -MU3202	-MU1603 -MU3203	-MU1604 -MU3204
■ <b>KVM Port</b>	Number of ports: 16 or 32 Connector: RJ-45 Connectivity: DVI-D / VGA connector dongle up to 40 meters (132 feet) via Cat6 / Cat5 cable		
■ <b>Local Console</b>	Nil for LCD console drawer version		
■ <b>Cat6 Remote Console</b>	Number of remote port: 1 for MU-1602 / MU-3202 2 for MU-1603 / MU-3203 3 for MU-1604 / MU-3204 Monitor port: DB15-pin VGA, up to 1600 x 1200 Keyboard & mouse port: 2 x USB type connector for keyboard & mouse Remote I/O: RJ45 via Cat5 / Cat5e / Cat6 cable up to 500 feet		
■ <b>Expansion:</b>	Up to 256 servers by 8-level cascade		
■ <b>Compatibility</b>	Multi-platform: Mix PCs, SUN and Mac G3 / G4 Mac / iMac Support: Windows 7 / Vista / 2003 / XP, Linux, Unix		
■ <b>Power</b>	Input: AC power adapter Consumption: Max. 48 Watt, Standby 5 Watt		
■ <b>Regulatory</b>	Safety: FCC & CE certified Environment: RoHS2 & REACH compliant		
■ <b>Environmental</b>	Operating: 0 to 50°C Storage: -5 to 60°C Relative humidity: 90%, non-condensing Shock: 50G peak acceleration (11ms, half-sine wave) Vibration: 58~100Hz / 0.98G (11ms / cycle)		

## < 2.6 > Resolution Support Information

## Matrix Cat6 KVM

	Max 4:3 LCD	Max 16:10 LCD
Remote console	1600 x 1200	1440 x 900
Local console	1600 x 1200	1440 x 900
IP console	1600 x 1200	N/A

Cat6 Dongle	EDID Resolution Hard-coded	Resolutions Capable			
		4:3			16:10
		1024 x 768	1280 x 1024	1600 x 1200	1440 x 900
DG-100	1600 x 1200	✓	✓	✓	✓*
DG-100S	1600 x 1200	✓	✓	✓	✓*
DG-100SD	1280 x 1024	✓	✓	✗	✗

\* Requires the user to enable showing unsupported resolutions via the target computer's video adapter settings ( effectively ignoring the DDC / EDID )


3.1 KVM Button

Power ON


- Turn off all servers and KVM switches
- Make sure all cables / connectors are properly connected
- Recommend Power ON sequence is monitor, KVM switch finally computer

Front Panel - Port LED Indications

16 ports

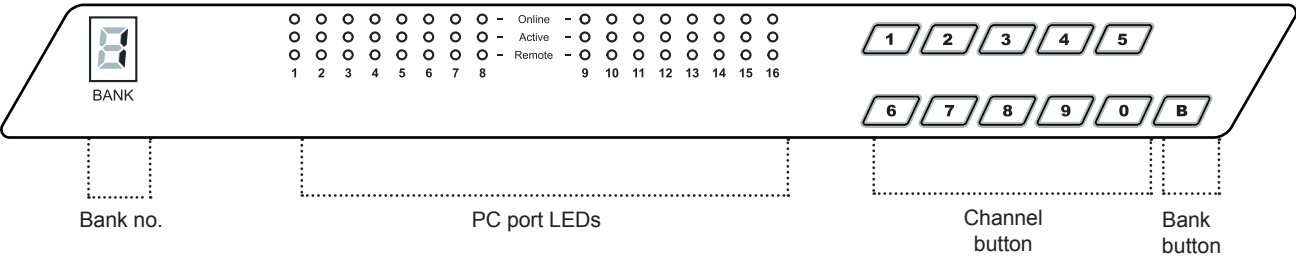

32 ports

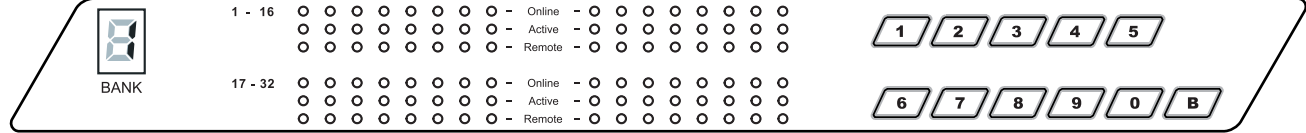

Bank no.	7-Segment BANK LED indication
PC port LEDs	<b>Online</b> : <b>Blue</b> LED on indicating a PC is connecting to the port <b>Active</b> : <b>Green</b> LED on indicating a selected channel <b>Remote</b> : <b>Orange</b> LED on indicating the port is selecting by IP / remote console
Channel button	Press to select channel from 01 to 32
Bank button	Select the bank from 1 to 8

The password is enabled by default, the default password is "00000000" eight zeros (**Do not use "0" on number pad**)

### ■ Enable password

1. Press the KVM hotkey **Scroll Lock + Scroll Lock + U**
  2. Logout the KVM by pressing the hotkey **Scroll Lock + Scroll Lock + P**
  3. In SUPERVISOR level, enter "00000000" eight zeros in user name & password field (**Do not use "0" on number pad**)
  4. In USER level, press **Space bar + Enter** in user name & password field
- Remark: Automatic logout after 10 minutes of inactivity

### ■ Set your own user name & password

1. Login the KVM in SUPERVISOR level by pressing "00000000" eight zeros in user name & password field
  2. Call KVM OSD menu by pressing the KVM hotkey **Scroll Lock + Scroll Lock + Space Bar**
  3. Press **F1** to the MAIN MENU
  4. Select "USER SECURITY"
  5. Set password in SUPERVISOR & USER level
    - a. In the left-top row "S" (SUPERVISOR), press **Enter** to set your own user name & password
    - b. In the row 1 to 8 (USER), press **Enter** to set your own user name & password
  6. Press **Enter** to save the setting or press **Esc** to cancel the editing without any change
- Remark: a. Blank has underscore, while SPACE doesn't have  
b. Press any alphanumeric key to move to next input item. SPACE is treated as a valid character

### ■ Change your password

1. Login the KVM in SUPERVISOR level by pressing your own user name & password
  2. Call KVM OSD menu by pressing the KVM hotkey **Scroll Lock + Scroll Lock + Space Bar**
  3. Press **F1** to the MAIN MENU
  4. Select "USER SECURITY"
  5. Change password in SUPERVISOR & USER level
    - a. In the left-top row "S" (SUPERVISOR), press **Enter** to change your user name & password
    - b. In the row 1 to 8 (USER), press **Enter** to change your user name & password
  6. Press **Enter** to save the setting or press **Esc** to cancel the editing without any change
- Remark: a. Blank has underscore, while SPACE doesn't have  
b. Press any alphanumeric key to move to next input item. SPACE is treated as a valid character

### ■ Disable your password

1. Press the KVM hotkey **Scroll Lock + Scroll Lock + U**
2. Logout the KVM by pressing the KVM hotkey **Scroll Lock + Scroll Lock + P**
3. You don't need user name & password to access the KVM OSD menu

### ■ Forget your password

Please contact your supplier for further support



Remark:

- You must press the KVM hotkey within 2 seconds
- A beep sound will be heard for successful entering KVM hotkey


## OSD Menu

PORT NAME			
BANK : 1			F1 : MENU
01	SYSTEM	01	F2 : LOGOUT
02	SYSTEM	02	F3 : PREV
03	SYSTEM	03	ESC : QUIT
04	SYSTEM	04	ENTER : COMPLETE
05	SYSTEM	05	↑/↓ : SELECT
06	SYSTEM	06	PgUp/PgDn :
07	SYSTEM	07	BANK SELECT
08	SYSTEM	08	
			USER :
			SUPERVISOR
			SCAN TIME :
			10 SEC FW1V3

## OSD operation

	next to the system name	The PC is powered on
	next to the system name	The PC is selected
<b>F1</b>		Access F1 MAIN MENU
<b>F2</b>		Logout the OSD menu
<b>F3</b>		Previous menu
<b>Esc</b>		Cancel / Quit
<b>Enter</b>		Complete / Switch to selected port
<b>↑/↓</b>		Switch to previous or next port
<b>PgUp/PgDn</b>		Switch to previous bank or next bank
<b>1 / 2 / 3 / 4</b>		Display port 01 ~ 08 / 09 ~ 16 / 17 ~ 24 / 25 ~ 32
		Remark: Display port 17 ~ 32 for 32 port model only

## F1 Main Menu

MAIN MENU		 X
SELECT OPTION :		
01	LANGUAGE	
02	PORT NAME EDIT	
03	PORT SEARCH	
04	USER SECURITY	
05	ACCESS LIST	
06	HOTKEY	
07	TIME SETTINGS	
08	OSD MOUSE	

01	LANGUAGE	OSD language change
02	PORT NAME EDIT	Define port name
03	PORT SEARCH	Quick searching by port name
04	USER SECURITY	Change password
05	ACCESS LIST	Define user access authority
06	HOTKEY	Change hotkey
07	TIME SETTINGS	Modify scan display time interval
08	OSD MOUSE	Modify OSD mouse speed

Local Console Hotkey	Function
<b>Scroll Lock + Scroll Lock + Space Bar</b>	Calling OSD menu
<b>Right-button mouse + Esc</b>	Calling OSD menu
<b>Scroll Lock + Scroll Lock + ↑</b>	Switch to previous port
<b>Scroll Lock + Scroll Lock + ↓</b>	Switch to next port
<b>Scroll Lock + Scroll Lock + PgUp / PgDn</b>	Switch to previous bank or next bank
<b>Scroll Lock + Scroll Lock + Bank no. + Port no.</b>	Switch to specific port
<b>Scroll Lock + Scroll Lock + B</b>	Turn the buzzer ON and OFF * Default the buzzer is ON
<b>Scroll Lock + Scroll Lock + P</b>	Logout the KVM if password security is ON. Show up the status windows

#### Advance hotkeys (for Supervisor login only)

<b>Scroll Lock + Scroll Lock + S</b>	Activate auto-scan mode for connected servers *Press any key to exit the auto-scan mode
<b>Scroll Lock + Scroll Lock + R</b>	Reset all the KVM settings to factory default *Except User Security settings
<b>Scroll Lock + Scroll Lock + U</b>	Disable and enable password security *Default security is ON
<b>Scroll Lock + Scroll Lock + L</b>	To enable / disable the screen saving function and 10 minutes auto-logout *Default the screen saving is OFF

**Remarks:** ■ Example of “**Scroll Lock + Scroll Lock + Bank no. + Port no.**”

- Bank No. : 1 to 8
- Port No. : 01 to 16
- e.g. Bank 1 Port 4 : **Scroll Lock + Scroll Lock + 1 + 0 + 4**
- e.g. Bank 2 Port 16 : **Scroll Lock + Scroll Lock + 2 + 1 + 6**

- You must press the hotkey within 2 seconds
- A beep sound will be heard for successful entering
- The numeric keypad is not supported, while in OSD screen, the arrow keys, PgUp, PgDn, and Enter keys are supports

Remote Console Hotkey	Function
<b>Scroll Lock + Scroll Lock + C</b>	Toggle switch between remote & local port
<b>Scroll Lock + Scroll Lock + Q</b>	Turn the buzzer ON & OFF *Default the buzzer is ON
<b>Scroll Lock + Scroll Lock + S</b>	Activate auto-scan mode for remote & local port *The scan time interval is 5 seconds
<b>Scroll Lock + Scroll Lock + A</b>	Auto-adjust the video signal

The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication.

All brand names, logo and registered trademarks are properties of their respective owners.

Copyright 2013 Austin Hughes Electronics Ltd. All rights reserved.